



**INSULATION**



### INSULATION SCREWDRIVER

The job isn't finished until everything is tightened down. Precision insulated tools fit and rip the fastener properly to apply maximum torque without damage to the head. The high-quality material blades minimize wear. The last thing you want is to have your driver slip out of the screw head and possibly contact a nearby conductor. TEKIRO offers multiple sizes for insulation screw driver. All certified to 1000 Volt ac and 1500 Volt dc.

- **Magnetic tip and corrosion resistant precision blade**
- **"Pentagon" neck sharp design prevents rolling away at the working place**
- **Double insulation provides more safety. ass 1000V safe voltage test.**
- **Slim front pole for easy access to any place**
- **Fully insulated to IEC/CEI900, DIN EN60900 and VDE068/2 strict regulations**


1000V IEC 60900:2004

ANSI American National Standards Institute


TORX®



The front end of the screw driver rod is 33% narrow, suitable for narrow spaces such as electric boxes

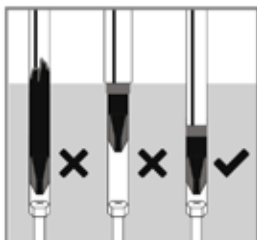


Insulated slim blade can easily reach the screws located in the deep and narrow areas, eliminating the interference caused by the regular insulated sheath

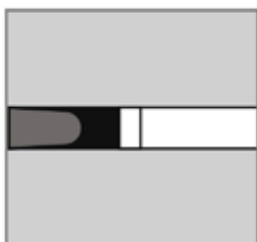

The diameter of its insulated sheath designed to perfectly match that of the blade.



Ergonomics And soft material handle provides high torsion and erases the physical stresses of screw driving.

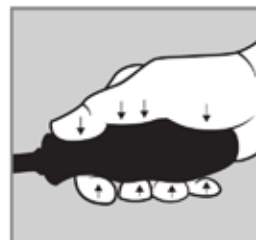

The handle was designed according to different hands holding, it can disperse the pressure evenly and reduce the ache when the application of force.



PP and TPV materials of the handle avoid slipperily and provide resistance to chemical, oil and most solvents. The handle design also can generate high torque coefficient.




## INSULATION SCREWDRIVER

OBENG LISTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	Weight (gr)	QTY / BOX INNER/MASTER
SD-IS1473	PH0 X 60 mm (3)	130	61	20	5	17	20	12 / 600 pcs
SD-IS1474	PH1 X 80 mm (4.5)	180	80	27	6	24	59	12 / 240 pcs
SD-IS1475	PH2 X 100 mm (6)	210	100	31	9	28	92	12 / 180 pcs
SD-IS1476	PH3 X 150 mm (8)	272	150	35	12	31	163	6 / 120 pcs
SD-IS1477	2.5 X 75 mm (-)	146	76	20	4	17	20	12 / 600 pcs
SD-IS1478	3 X 100 mm (-)	170	101	22	6	17	24	12 / 600 pcs
SD-IS1479	4 X 100 mm (-)	200	100	27	7	25	58	12 / 240 pcs
SD-IS1480	5.5 X 125 mm (-)	225	126	27	9	25	77	12 / 240 pcs
SD-IS1481	6.5 X 150 mm (-)	260	150	31	11	27	112	12 / 180 pcs
SD-IS1482	8 X 175 mm (-)	297	175	30	12	30	176	6 / 120 pcs



- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE068/2 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Magnetic tip and corrosion resistant precision blade
- Ergonomically designed impact resistant handle with non-slip grip for comfort, maximum torque transfer and roll resistance



## INSULATION SCREWDRIVER SET 4 PCS

OBENG LISTRIK SET 4 PCS

SIZE	CONTENT	Weight (gr)	QTY / BOX INNER/MASTER
4 pcs	2 pcs (+) #PH1 X 80 mm	300	4 / 16 set
	(+) #PH2 X 100 mm		
	2 pcs (-) 3 X 100 mm		
	(-) 5.5 X 125 mm		



- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE068/2 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Magnetic tip and corrosion resistant precision blade
- Ergonomically designed impact resistant handle with non-slip grip for comfort, maximum torque transfer and roll resistance

ITEM CODE	SIZE
SD-IS14488	4 pcs

## INSULATION SCREWDRIVER SET 8 PCS

### OBENG LISTRIK SET 8 PCS

ITEM CODE	SIZE
SD-IS1489	8 PCS

- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE068/2 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Magnetic tip and corrosion resistant precision blade
- Ergonomically designed impact resistant handle with non-slip grip for comfort, maximum torque transfer and roll resistance

SIZE	CONTENT	Weight (gr)	QTY / BOX INNER/MASTER
8 pcs	2 pcs (+) #PH0 X 60 mm	580	3 / 12 set
	(+) #PH1 X 80 mm		
	(+) #PH2 X 100 mm		
	4 pcs (-) 2.5 X 75 mm		
	(-) 4 X 100 mm		
	(-) 5.5 X 125 mm		
	(-) 6.5 X 155 mm		
1 pc	AC Tester		




- Easy to use
- Indicator lamp for easy check

## AC TESTER SCREWDRIVER


### TESPEN AC

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	Weight (gr)	QTY / BOX INNER/MASTER
EL-AT1497	105-250 V	142	70	13	3	13	46	24 / 144 pcs



## INSULATION LINESMAN PLIERS

**TEKIRO** Insulation Pliers are 1000V rated and VDE certified for safety on the job. The multi-colour, sleek design with small thumb guards make for easy handling and storage. The durable, moulded Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations for insulated tools. Insulated for protection when working near energized sources

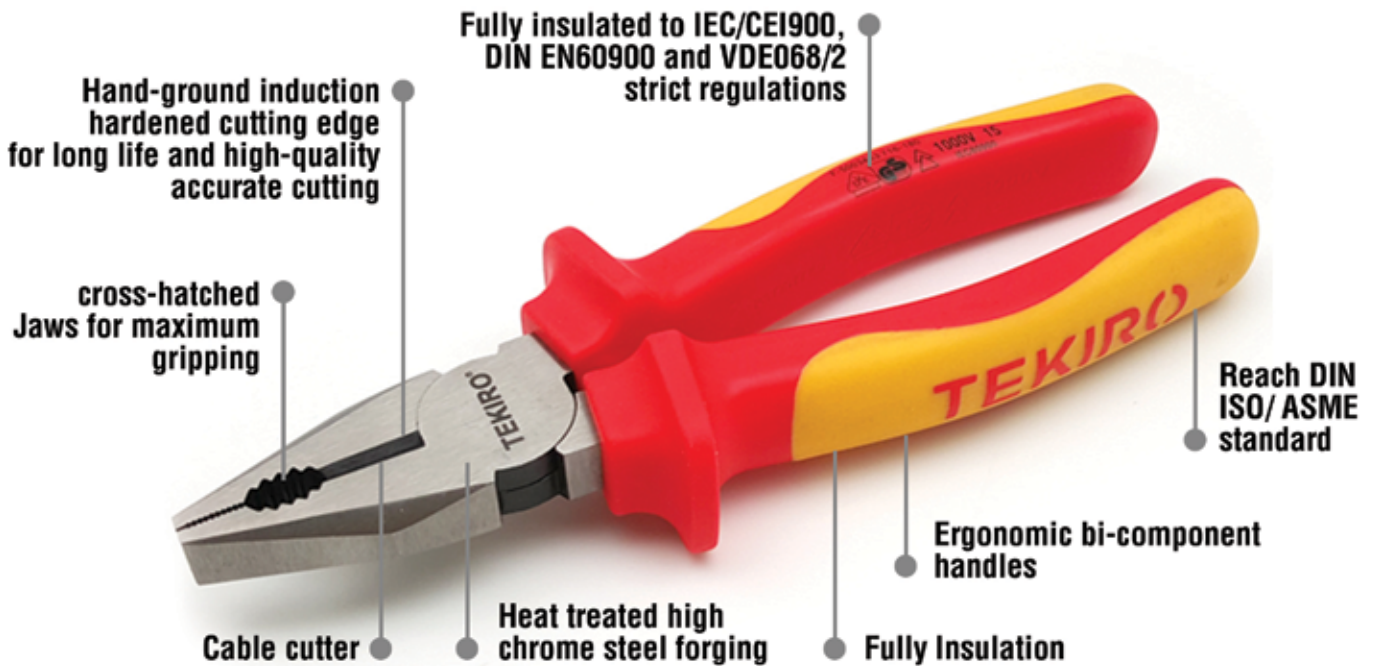

### SAFE AND RELIABLE

The power side cutters with VDE insulation ensure safe working up to 1,000 volts. The integrated protective insulation helps to work safely even in areas that are difficult to access.



### HANDY GRIPS

The practical anti-slip protection makes it possible to hold the cutters safely. The ergonomic shape also ensures a more effective power transmission.



### PRECISE CUTTING FUNCTION


A cutting function is integrated for efficient cutting of cables and wires








### INSULATION LONG NOSE PLIERS

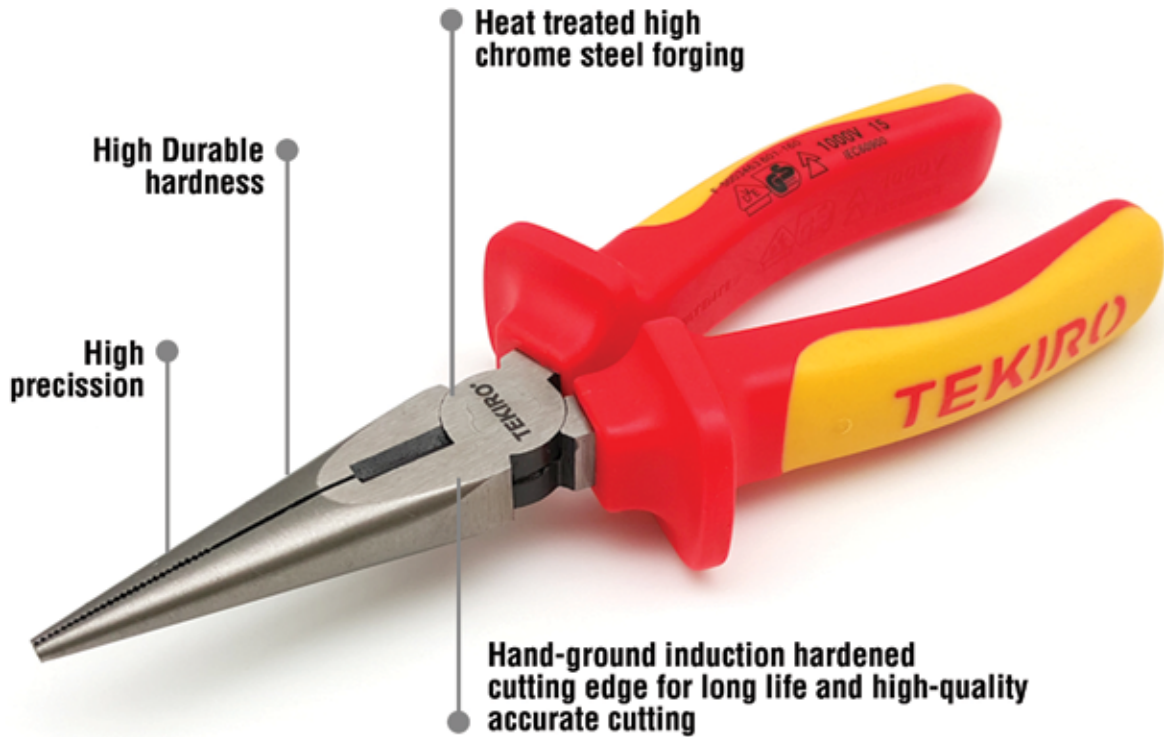

### INSULATION DIAGONAL PLIERS

Wires need cutting. Cables need pulling. Knockouts need twisting. Sometimes things just need holding. **TEKIRO** insulation Long nose pliers and cutters give you a range of options when the job requires jaws with bite.

### INSULATION DIAGONAL PLIERS LONG

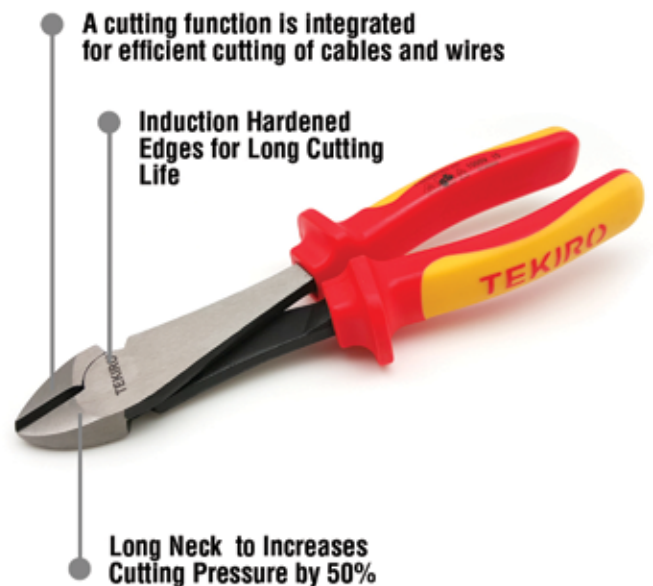


## INSULATION LINESMAN PLIERS

### TANG KOMBINASI LISTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	6 (mm)	WEIGHT (gr)	QTY / BOX INNER/MASTER
EL-IL1491	7"	186	27	126	11	37	21	281	12 / 48 pcs
EL-IL1492	8"	210	30	142	12	41	23	392	12 / 48 pcs




- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Heat treated high chrome steel forging for long life and durability
- Edge interlocking joint assembly
- Hand ground induction hardened cutting edge for long life and high quality accurate cutting

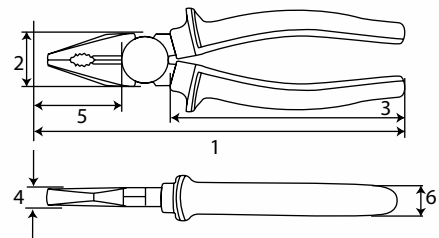

## INSULATION LONG NOSE PLIERS


### TANG LANCIP LISTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	6 (mm)	WEIGHT (gr)	QTY / BOX INNER/MASTER
EL-LN1493	6"	161	19	95	10	39	20	159	12 / 48 pcs
EL-LN1494	8"	231	20	144	11	60	22	254	12 / 48 pcs

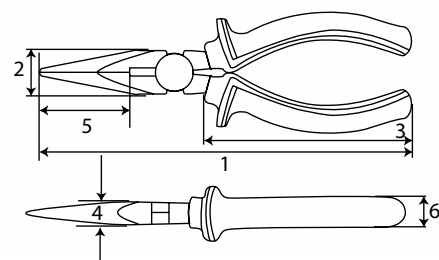

- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Heat treated high chrome steel forging for long life and durability
- Edge interlocking joint assembly
- Hand ground induction hardened cutting edge for long life and high quality accurate cutting

- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Heat treated high chrome steel forging for long life and durability
- Edge interlocking joint assembly
- Hand ground induction hardened cutting edge for long life and high quality accurate cutting

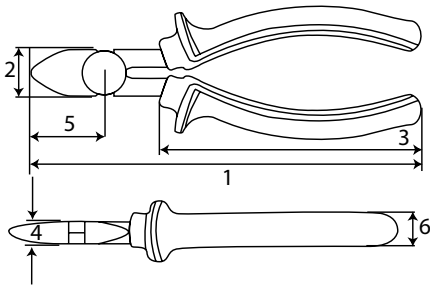


## INSULATION DIAGONAL PLIERS

### TANG POTONG LISTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	6 (mm)	WEIGHT (gr)	QTY / BOX INNER/MASTER
EL-ID1495	6"	166	22	125	10	21	21	228	12 / 48 pcs



- 1000V VDE certified is approved to ensure user safety
- Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations
- Reach DIN ISO/ ASME standard
- Ergonomic bi-component handles
- Heat treated high chrome steel forging for long life and durability
- Edge interlocking joint assembly
- Hand ground induction hardened cutting edge for long life and high quality accurate cutting

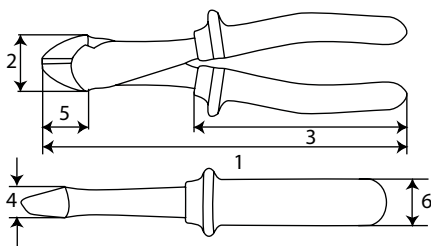

## INSULATION DIAGONAL PLIERS LONG

### TANG POTONG PANJANG LISTRIK


ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	6 (mm)	WEIGHT (gr)	QTY / BOX INNER/MASTER
EL-ID1496	8"	205	28	114	11	21	22	284	12 / 48 pcs





## INSULATION ADJUSTABLE WRENCH

**TEKIRO** insulated adjustable wrenches are made for professional electrical users, moulded Fully insulated to IEC/CEI900, DIN EN60900 and VDE0680 strict regulations for insulated tools. Insulated for protection when working near energized sources with the VDE certified for safety on the job, the jaw design help reduces slippage. **TEKIRO** use high-quality material for durable use

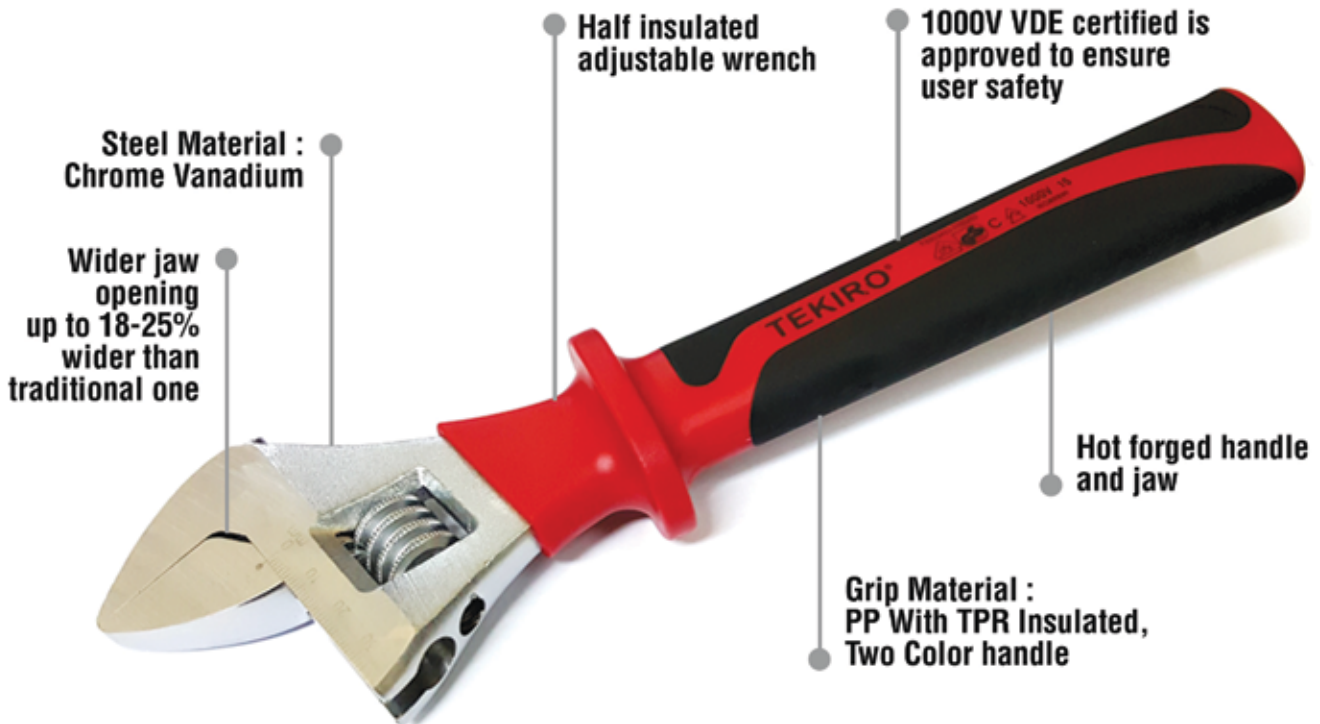

### SAFE AND RELIABLE

The power side cutters with VDE insulation ensure safe working up to 1,000 volts. The integrated protective insulation helps to work safely even in areas that are difficult to access.



1000V  
IEC 60900:2004



TORX®



### HANDLE STOPS

Special features for safety for users, to prevent electric shock



### COMFORT HANDLE

The practical anti-slip protection makes it possible to hold the handle safely and comforts. The ergonomic shape also ensures a more effective power transmission




- Half insulated adjustable wrench
- Handle stop prevents user electric shock.
- Thicker handle provides comfortable hand fit.

## INSULATION ADJUSTABLE WRENCH

### KUNCI INGGRIS LISTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	6 (mm)	Weight (gr)	QTY / BOX INNER/MASTER
EL-AW1498	10"	260	22	16	72	32	35	482	6 / 24 pcs
EL-AW1499	12"	309	24	20	81	37	39	710	6 / 24 pcs

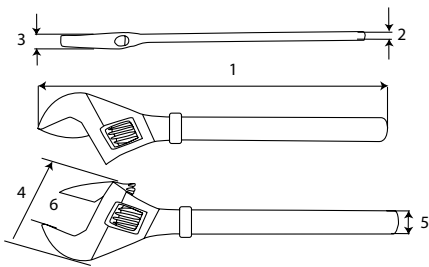


- Protection against spark discharge
- Straight cable knife
- Ergonomic grip with protective cap

## INSULATION CUTTER

### PISAU ELEKTRIK

ITEM CODE	SIZE	1 (mm)	2 (mm)	3 (mm)	4 (mm)	5 (mm)	Weight (gr)	QTY / BOX INNER/MASTER
GT-IC1485	17 mm	196	157	36	17	19	110	20 / 60 pcs

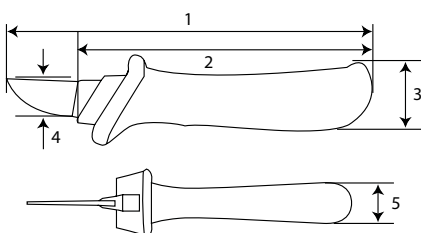

**BELIEVE**  
**IN YOUR CHOICE**

**WWW.TEKIRO.COM**